

Product Data Sheet



Website: www.after-printing.com
 Email: sales@after-printing.com
 WhatsApp: +86 13599537359



Thermal Lamination Film



Type: Various (see below introduction)
 Finishing: Glossy & Matte
 Thickness: from 15micron to 250micron
 Min. Order Q'ty: 1 Tons (1,000.00kgs)
 Supply Ability: 850 Tons / month
 Delivery Lead: 20 days a 40 feet container
 Port: Xiamen, Shanghai

Product Information

| | |
|--|-------------------------------------|
| Country: China | Brand: AFP |
| Material: BOPP / PET Film | Type: Stretch Film |
| Hardness: Soft | Processing Type: Multi extrusion |
| Usage: Laminating / Packaging Film | Splice: ≤1 |
| Roll Length: from 50meter to 4000meter | Roll Width: from 180mm to 1880mm |
| Paper Core: 1 inch (25.4mm) or 3 inch (76mm) | Operation: by dry or heat laminator |

Product Introduction

Thermal lamination film is used to laminate printings pursuing effect of more luster, elegant, visually comfortable sense, and comfortable touch sense.
 It prevents lamination from being pressed, bubbled and desquamated.
 It also protects laminated printings from harmful substances and is moisture-proof, ensuring a long life storage.

Thermal lamination film is produced by multiple extrusion coating lines.
 It is consisted of two layers. One is plastic film, of which mainly is BOPP or PET film, another layer is adhesive glue of EVA .

Thermal Lamination Film is also called dry, hot or heat lamination film



As a professional manufacturer and supplier, we are producing thermal lamination film with various finishing appearances, including:

Glossy



Matte



Soft Touch



Scratch Resistant



Digital / Super Bonding



Embossed



Metalized



Holographic



3D / Lenticular



Glitter / Sparkle




Product data of each the above available via sales@after-printing.com

All the above types of thermal lamination film are at format of roll, or said laminate roll.
 Thermal lamination film is workable for different ways of printing, especially offset printing.
 It meets most paper or paperboard criteria, like 80gsm, 125gsm or 250gsm.
 Matt thermal lamination film is performing well at UV Varnish and hot stamping.

Packaging & Shipping

- *By Pallet
- *One Roll thermal lamination film, One carton
- *Tens of rolls of thermal lamination film in a pallet
- *10 to 12 pallets loaded into 1*20FCL (appro. 13MTs)
- *Or 20 to 22 pallets loaded into a 40 feet container (appro. 25MTs)
- *Seaport: Xiamen, Shanghai

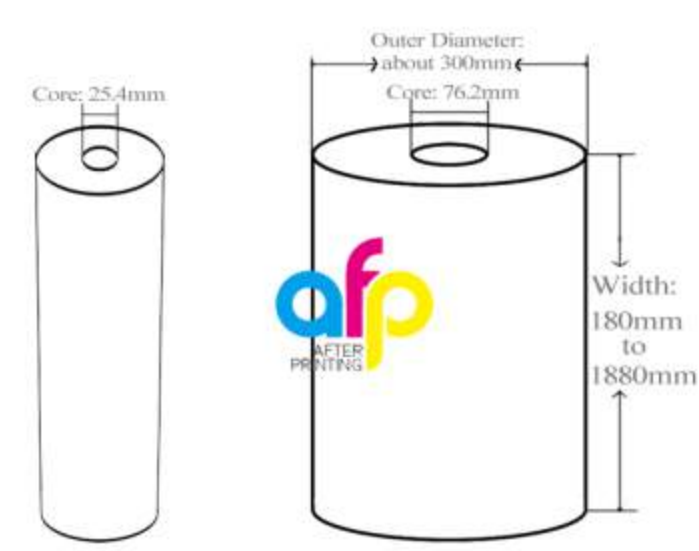

We take care of each detail of packaging.



FAQ

About Samples

- *Samples for testing are available and free
- *Usually measured 330mm*100m a roll
- *The freight for sample delivery is at receiver's side
- *But to be refunded by deducting from the right coming order automatically
- *For saving the cost, we recommend the way of prepaid instead of collect

About Capacity

- *5 coating lines
- *20 days delivery of a 40 feet container
- *850 tons per month
- *Thickness from 15micron to 250micron
- *Roll width from 180mm to 1880mm
- *Roll length from 50m to 4000m

About Responsibility and After-sale Service

- *9 months warranty
- *In case of any quality problem happens, you must be equivalently compensated

BOPP Roll

PET Roll

